



REVISIONS			
REV	APPR	DATE	

NOTES: Unless Otherwise Specified


1. MATERIAL: 2 LAYERS, 0.062" THK. FR-4 GLASS EPOXY 2 OZ. COPPER CLAD.
2. ALL HOLE SHALL BE PLATED THRU.
3. PLATE THRU HOLES WITH COPPER .0014 MIN. THICKNESS. ALL HOLE SIZES IN HOLE TABLE ARE AFTER PLATING.
4. SILKSCREEN: WITH WHITE EPOXY NON-CONDUCTIVE INK.
5. NO SILKSCREEN ALLOWED ON PADS LANDS.
6. SOLDER MASK: LPI, GREEN.
7. NO BLOCK SOLDERMASKING OF PADS ROWS.
8. DO NOT MAKES CHANGES ON SILKSCREEN, SUCH AS COMPANY LOGO, QC STAMPS.
9. DO NOT PLATE TOOLING(3PLCS) AND SCORING(26PLCS) HOLES. (Reference Drawing Dwg No. DC205A )
10. SCORING:



SIZE	QTY	SYM	PLTD
15	95	+	PLTD
125	4	X	PLTD
70	2	□	NPLTD
94	4	◇	PLTD

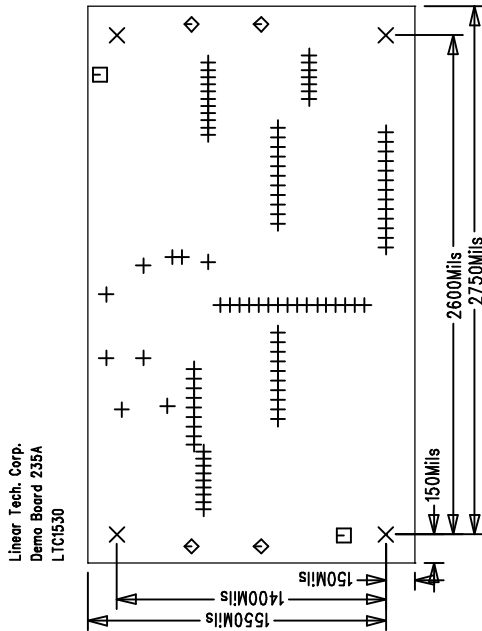

Fabrication Drawing

APPROVALS			 LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
	INIT	DATE	TITLE: High Efficiency Boost Reg.			
DRAWN						
CHECK						
DESIGN	Rmb					
ENGR	CV					
			SIZE	NONE	Demo Board 235	REV. A
SCALE = NONE			DES-0268		SHT 1 of 1	