
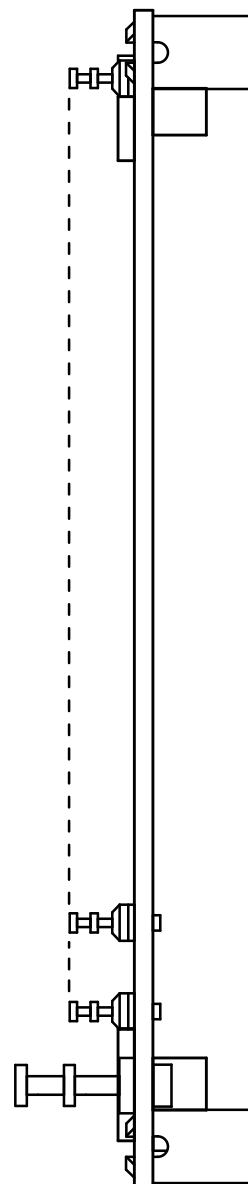


NOTES: UNLESS OTHERWISE SPECIFIED,

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE REFLOW SOLDER BOTH SIDES.
MAXIMUM SOLDER TEMPERATURE SHALL BE <250 DEGREES CELSIUS.
3. INSTALL SHUNTS APPROXIMATELY WHERE SHOWN.
4. LAND PATTERNS NOT STUFFED SHALL BE FREE OF SOLDER.
MASK THE SOLDER STENCIL AT THESE LOCATIONS.

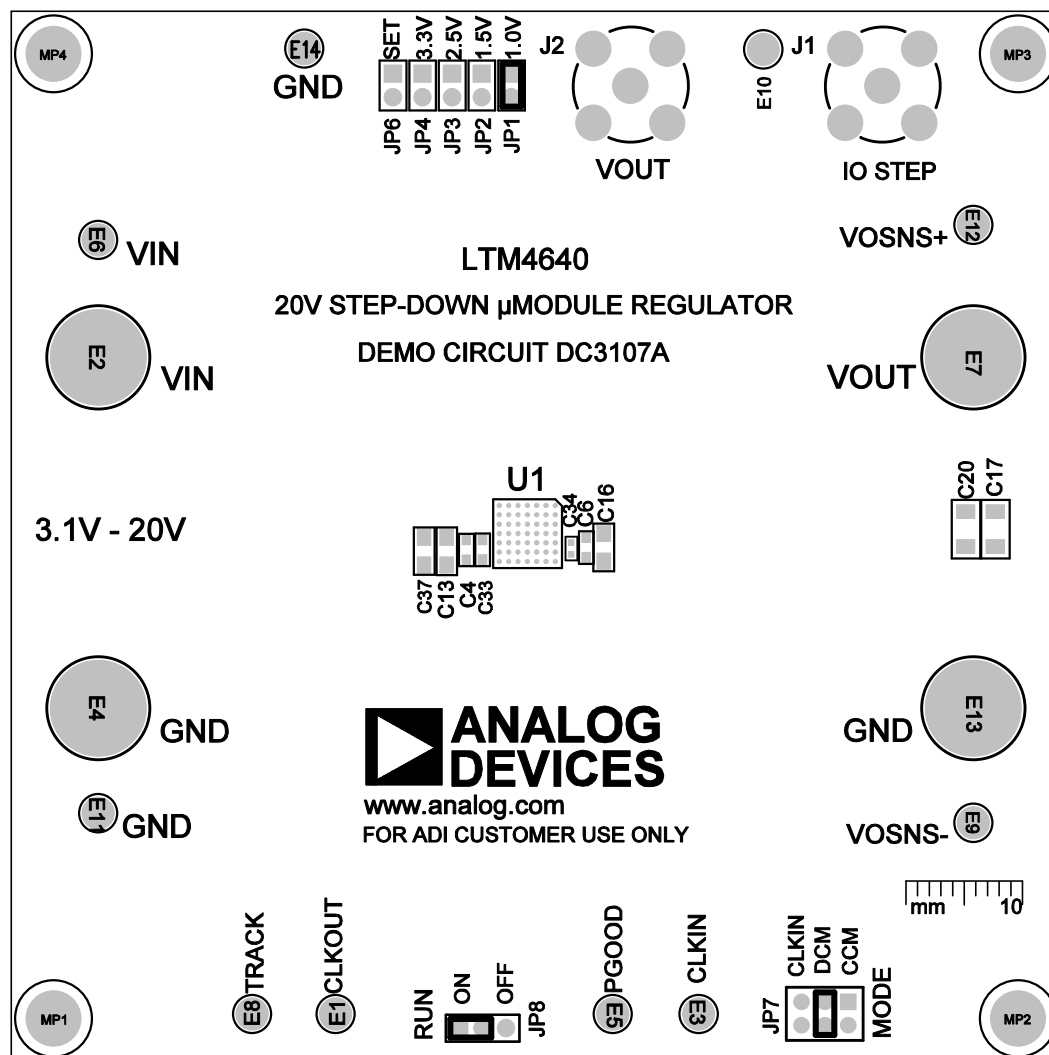

ANALOG DEVICES INC.

DC3107A REV 3

05/13/22

TOP SILKSCREEN

TOP ASSEMBLY